


Amarr Sectional Doors

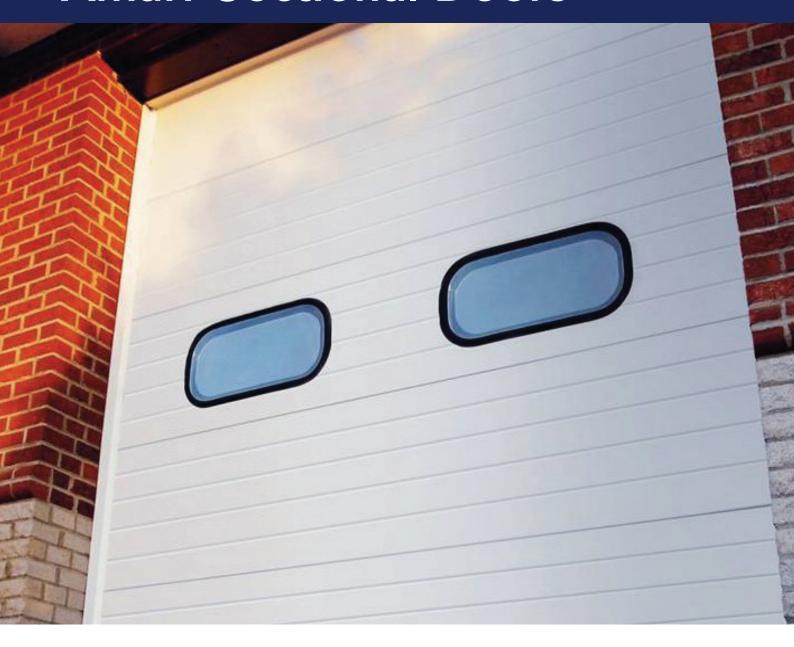

Triple Layer Insulated Sectional Doors
Model 2742

RSI-Metric Value

3.4

Triple Layer Insulated Sectional Doors



Colours

- Commercial White Standard
- Commercial Grey Optional
- Commercial Brown Optional

The 2742 Model is the high R-Value door designed exclusively for Commercial and Industrial sectional overhead door market

It's construction is a foamed-in-place polyurethane insulation which creates a strong monolithic panel that is highly energy efficient.

Design

Designed for use in commercial installations the Amarr 2742 is the perfect completion to a dock installation, or installed separately for your cool room application.

The Pencil groove construction separates the inner and outer skins so that heat transfer is minimised through the covering, very important to avoid condensation on the outer surface. The foamed-in-place polyurethane insulation provides a door panel of 51mm.

Triple-Layer


Steel + Insulation + Steel

Track: All Doors come standard with 76mm track in Standard Lift, High Lift or Vertical Lift. Custom track configurations are also available.

Hardware: Includes galvanised steel hinges and galvanised steel track brackets. All rollers have minimum 10-ball bearings.

Springs: Torsion springs are oil tempered, helical wound and custom computed for each door for a minimum 10,000 cycle life.

*Safetech supplies as standard 50,000 cycle life springs. (Subject to minimum door width and track type. May be reduced on smaller doors, and larger doors with vertical lift track).



Integration

Safetech ensures overall system installation and integration. Installing a sectional door with your dock leveller/lift means that they are integrated for optimum functionality. Locking out the door so that it will not close until the leveller is returned to its home position, and locking out the leveller until the door is opened ensures operation in the correct sequence. (Note Sequencing is optional).

Powered Jackshaft Operator

This door is optimised for dock installations with the inclusion of powered operation. The Maneras Operator comes standard with momentary up and stop button, and constant pressure down control.



Options

- Chain operation over ride Vision panels
- Photo sensors
- Bump Edge
- Remote controls
- Full dock equipment integration panels

39-45 Della Torre Road, Moe Victoria 3825

t: 1800 674 566

e: sales@safetech.com.au